



Changing directions sooner or later

GURA Universal Flexible Skatewheel Conveyors can be used in all areas of the in-house transport of goods where a flexible routing is needed. It has a patented system which has been optimized and adapted to the newest requirements of the in-house logistic structures.

The especially high quality standard is based on the experiences with many different appliances and the competence of our committed employees. A special feature of our flexible skatewheel conveyors is its flexible handling and the small dimension while it is contracted. The mobility and adjustable length of this conveyor can master all kinds of material flow situations.

Goods can not only be moved horizontally; by adjusting the conveyor stands the desired decline is created in no time. You can either create a straight line or you can easily form curves up to 180°. The goods will be able to follow the course chosen without guide rail. In addition to the standard types we can develop and produce customized conveyors within a very short period of time:

Above-average width, height adjustable, rack-type version, etc. You choose your version of the conveyor module according to the requirements of the goods to be conveyed. This means you are dealing with a system including all customer requirements.



GS Certification of the Technical Inspection Agency of the Rhineland (TUV Rheinland)

Ancillary Equipment:



Hinged End Stop




Connecting Component



GURA Universal Flexible Skatewheel Conveyor

- Bed widths: from 300 mm to more than 1200 mm in modular dimension
- Extracted track length of approx. 10 m possible
- Continuous height adjustment: 720 - 1150 mm
- When contracted it has only a small space requirement
- Durable bright zinc-plated version
- Mobile with lock-type swivelling castors to guarantee a safe standing
- Curves up to a max. of 180° are possible
- Conveyor rollers: plastic (KU), zinc-plated steel (SV) (depending on application), Ø 48 mm
- Large-scale ancillary equipment: end stops, connecting components and supports to be attached to existing conveyor modules
- Customized modules: eg. rack-type or powered versions
- Huge product know-how with 50 years of experience, continuous quality surveillance and ongoing development

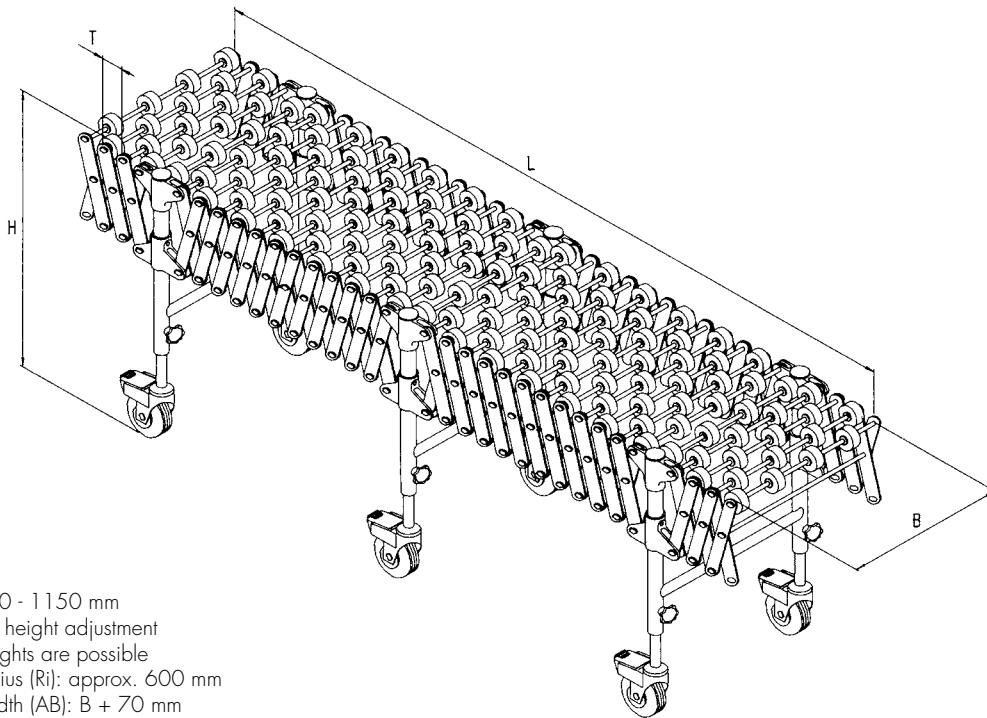

Height: 720 - 1150 mm
 Continuous height adjustment
 Special heights are possible
 Internal radius (Ri): approx. 600 mm
 External width (AB): B + 70 mm

Order No. 11000...	B [mm]	Number of Axles	Number of Crosses	Wheels per Axles	Number of Legs	T min. [mm]	T max. [mm]	L min. [mm]	L max. [mm]	Maximum Load between 2 Legs [daN]	Weight with Steel Skate- wheels [kg]	Weight with Plastic Skate- wheels [kg]
333 2KU	300	35	2	3	3	32	150	1300	4500	100	59	56
334 2KU		48			4			1750	6300		78	75
335 2KU		61			5			2200	8000		97	90
336 2KU		74			6			2650	9800		116	109
443 2KU	400	35	2	4	3	32	150	1300	4500	100	66	59
444 2KU		48			4			1750	6300		87	82
445 2KU		61			5			2200	8000		116	110
446 2KU		74			6			2650	9800		135	127
553 3KU	500	35	3	5	3	32	150	1300	4500	125	82	73
554 3KU		48			4			1750	6300		112	102
555 3KU		61			5			2200	8000		142	128
556 3KU		74			6			2650	9800		172	154
663 3KU	600	35	3	6	3	32	150	1300	4500	125	86	76
664 3KU		48			4			1750	6300		121	109
665 3KU		61			5			2200	8000		158	142
666 3KU		74			6			2650	9800		191	172
883 3KU	800	35	3	8	3	32	150	1300	4500	125	90	79
884 3KU		48			4			1750	6300		130	116
885 3KU		61			5			2200	8000		174	156
886 3KU		74			6			2650	9800		210	190
1013 3KU	1000	35	3	10	3	32	150	1300	4500	125	100	88
1014 3KU		48			4			1750	6300		146	130
1015 3KU		61			5			2200	8000		194	174
1016 3KU		74			6			2650	9800		236	215
1223 4KU	1200	35	4	12	3	32	150	1300	4500	150	123	110
1224 4KU		48			4			1750	6300		179	161
1225 4KU		61			5			2200	8000		233	211
1226 4KU		74			6			2650	9800		278	244

KU = blue plastic skatewheels, available on request; SV = zinc-plated steel skatewheels