



Our motto:
Continuous movement and ongoing development



GURA Universal Flexible Roller Conveyors can be used in all areas of the in-house transport of goods where a flexible routing is needed. It is a system which has been optimized and adapted to the newest requirements of the in-house logistic structures.

The GURA powered flexible conveyors come with 3 rollers per axle. The rollers in the middle are powered by means of chains in the neutral area through one or two three phase gear motors of 230/400 volts. The standard speed is $v = 0.3 \text{ m/s}$. The rollers have bearings and are made of highly shock-resistant plastic. The conveyors are flexible, bendable and height adjustable. The goods will be able to follow the course chosen without guide rail. The powered version can be combined with non-powered GURA Universal Flexible Conveyors and with the inflexible GURA Roller and Skate-wheel Conveyors by using connecting components or couplers.

The especially high quality standard is based on the experiences with many different appliances and the competence of our committed employees.


Ancillary Equipment:



Connecting Component

GURA Universal Flexible Roller Conveyor
 Powered Electronically

- Bed widths: 400, 500, 600 mm
- Extracted track lengths up to approx. 7.5 m possible
- Continuous height adjustment: 720 - 1150 mm
- When contracted it has only a small space requirement
- Durable, bright zinc-plated version
- Mobile with lock-type swivelling castors to guarantee a safe standing
- Curves up to a max. of 180° are possible
- Conveyor rollers: plastic, zinc-plated steel (depending on application), Ø 50 mm, drive rollers are made of black plastic
- Possibility to be combined with other GURA conveying systems
- Huge product know-how with 50 years of experience and continuous quality surveillance

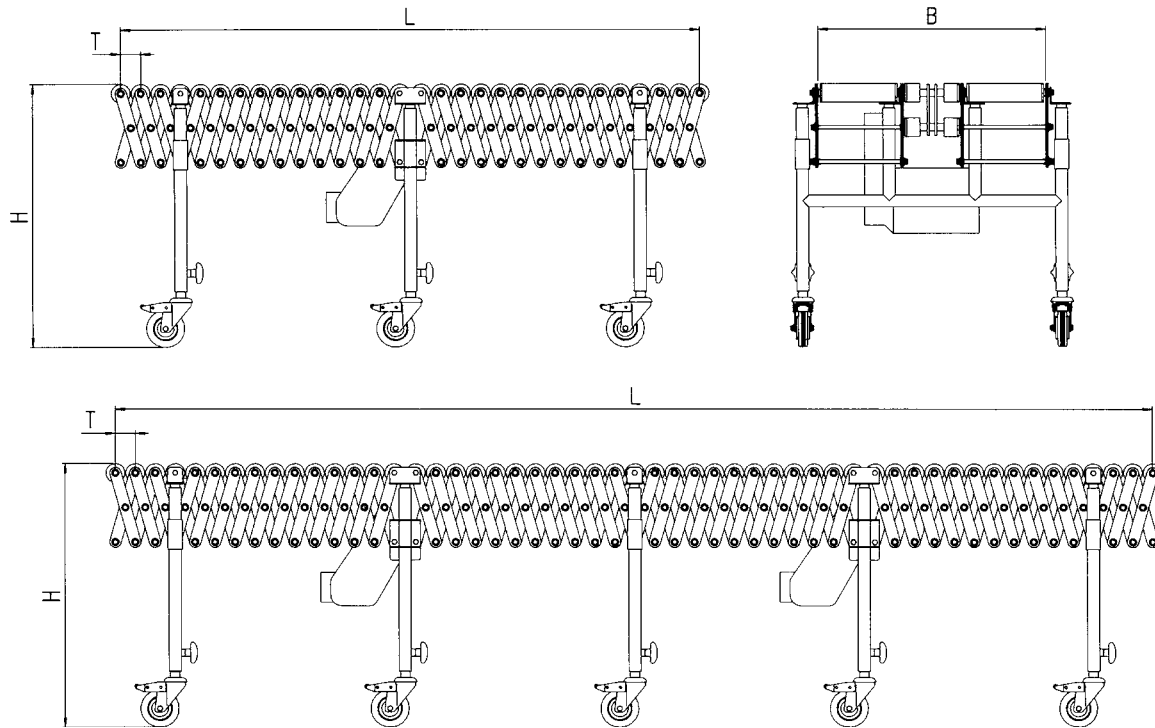

Height: 720–1150 mm
 Continuous height adjustment
 Special heights are possible

Order No.	B [mm]	Number of Axles	Number of Crosses	Rollers per Axle	Number of Legs	T min [mm]	T max [mm]	L min [mm]	L max [mm]	Capacity between 2 Legs	Conveying Speed [m/s]	Driving Power [kw]
13000 433 4KU	400	30	4	3	3	56	150	1800	4200	125	0.3	0.37
13000 435 4KU		53			5			3100	7500			2 x 0.37
13000 533 4KU	500	30	4	3	3	56	150	1800	4200	125	0.3	0.37
13000 535 4KU		53			5			3100	7500			2 x 0.37
13000 633 4KU	600	30	4	3	3	56	150	1800	4200	125	0.3	0.37
13000 635 4KU		53			5			3100	7500			2 x 0.37

Standard version without electrical wiring. Customized versions, electrical equipment and adjustable drives on request.