

Short or long

GURA Mini Belt Conveyor Series 30500

The GURA Mini Belt Conveyor of series 30550 and 30560 is designed to convey goods up to a max. load of 5 da/m when space is a problem.

It can be used for horizontal transport as stand alone application or within complete conveying systems in different industrial areas.


As an example: The Mini Belt Conveyor has a very low overall height of only 55 mm and a serial oil and grease resistant PU belt. It is best suited for transporting the output of automatic punching and screw cutting machines and with an additional hopper unit can be used to fill vibrating, sorting and input systems.

Ancillary equipment: guide rails, stainless steel hopper with different capacities, supports, protective motor switch, frequency control to adjust conveying speed, indexed control device, light barrier control, reverse control and a variety of special belts, for example for applications in the food industry.



GURA Mini Belt Conveyor

- Belt widths (NB) [mm]: 40, 90, 140, 190, 240, 290, 390, 490, 590, 690, 790
- Lengths [mm]: 500 bis 10000
- Customized lengths and widths on request
- Capacity: 3-5 [daN/m]
- PU belt: oil and grease resistant
- Return pulleys: 52 mm
- Drive pulley: 52 mm
- Gear motor: Durable and maintenance-free 230 / 400 Volt, 50Hz
- Frame: Anodized aluminium industrial profiles
- Belt glides over the stainless steel sheet
- Belt speed (v) up to: max. 80 m/min; series 30360 max. 60 m/min Frequency control (three phase A.C.) Control Range 1/7

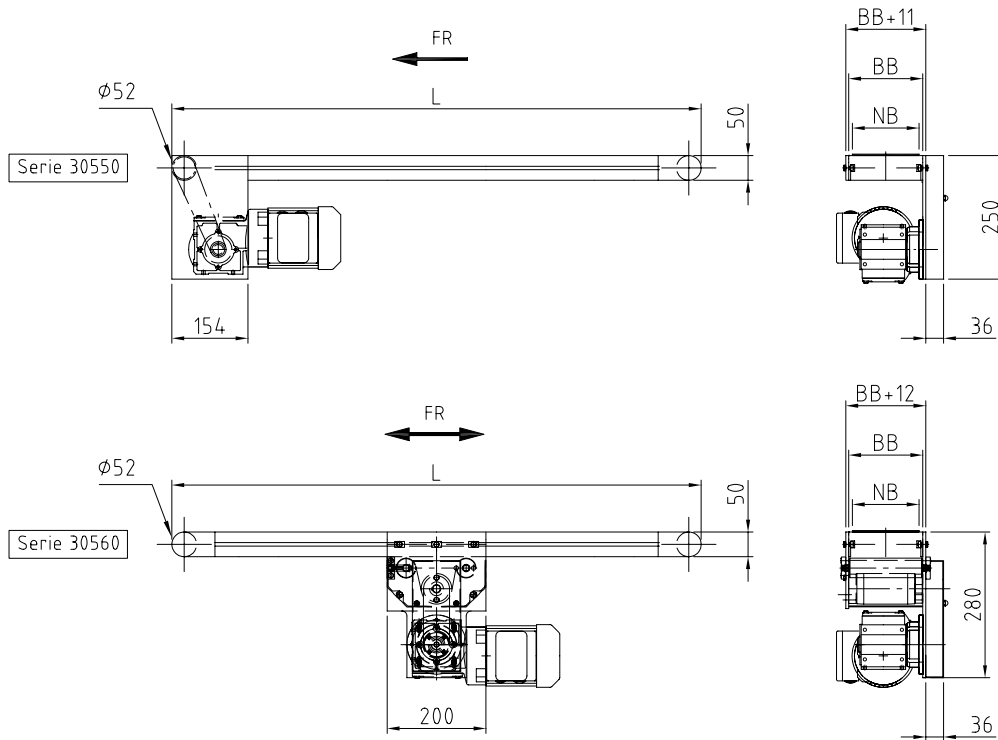

Mini Belt Conveyor

Series	NB [mm]	Roller pitch (A-A) [mm]	Drive*	v [m/min]	Belt Material	Capacity* [daN]
30550	40,90,140,190,	310-10000	230/400V, 50hz	max. 80	PU / PVC	7
30560	240,290,390, 490,590,690,790	500-10000	230/400V, 50hz	max. 80	PU / PVC	7

* Benchmarks
 Mandatory values on request.

Ancillary Equipment:

Series	Description
	Single support with base plate, continuously height adjustable up to max. 1,200 mm protective motor switch with electric plug and a 3 m cable frequency regulation for continuous rpm control guidance: 25, 50, 75 mm high, trough

Example order: 30550 – 140 – 2000 = Mini Belt Conveyor, Series 30550

- 30550 = Series No.**
- 140 = Working width (NB) [mm]**
- 2000 = Roller pitch (A-A) [mm]**