




## GURA Pallet Roller Conveyor



The GURA Gravity Pallet Roller Conveyor is designed to convey pallets, boxes, steel and plastic containers. This roller conveyor is mainly used in in-house transport with picking, sorting and distribution systems.

It safely conveys goods up to a maximum load of 2000 daN.


The zinc-plated rollers are equipped with an internal thread axle and steel roller beds. As a standard the sigma profile comes Sendzimir zinc-plated (SV). It is also available enamelled. The durable H-type supports made of a U-shaped profile (50x100x50x5) come enamelled and are equipped with adjustable feet (M24) with a range of adjustment of  $\varnothing$  30 mm or rather  $\varnothing$  50 mm.

Ancillary equipment: eg. end stops, side stops, buffers, centring devices and light barrier holders.

Additional system components are available too.

### GURA Pallet Roller Conveyor

- Bed widths (NB): 900, 1100 mm
- Customized widths possible
- Lengths: as a multiple of the modular dimension as required
- Roller pitches: 100 mm, 150 mm, 200 mm
- Sigma profile: 130x60 mm, Sendzimir zinc-plated (SV) or enamelled (SL)
- Durable H-type supports with adjustable feet (M24), enamelled
- Standard conveyor height: 500/300 mm, special heights on request

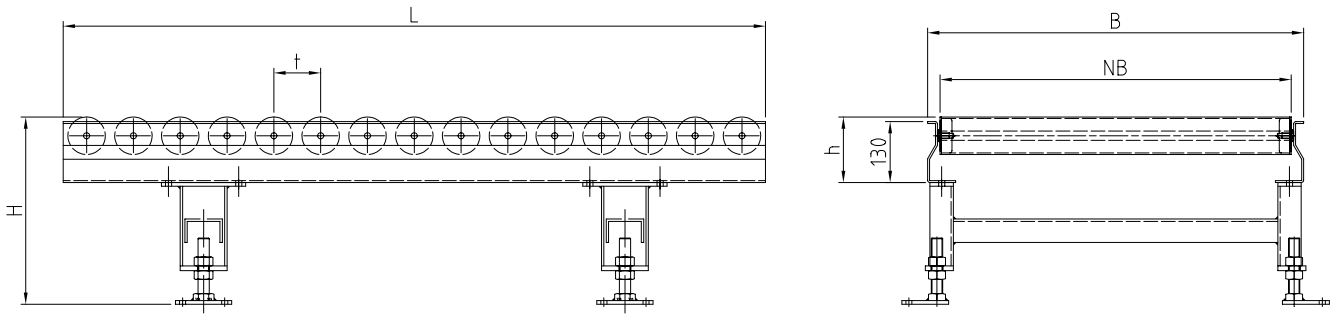

**Gravity Pallet Roller Conveyor, Sigma Profile**

Series	NB [mm]	t [mm]	L [mm]	Rollers D [mm]	h [mm]	H [mm]	Capacity* [daN]
60700			1000,1500	60x2 SV	140		
60800	900,1100	100, 150, 200	2000, 3000	80x2 SV	140	300,500	max. ca 2000
60900				89x3 SV	144,5		

SV = Zinc-plated steel

\* Mandatory values on request

**Example order:** 60700 – 150 – 900 – 1500 = Roller Conveyor Segment, Rollers 60x2 mm, Zinc-Plated Steel

60700 = Series no.

150 = Roller pitch (t) [mm]

900 = Nominal width (NB) [mm]

1500 = Length (L) [mm], as a multiple of the roller pitch

**Ancillary Equipment:**

Series	NB [mm]	H [mm]	Description
F6005			foot, +- 50 mm
F6006	900, 1100	300, 500	foot, +- 30 mm
64900			buffer, running meter
64910			charging device, heavy version
64930			charging device, light version, mounted at roller conveyor
64940			light barrier and reflector holder
95990			Flange, set, screwed D = 80 [mm]