




GURA Pallet Roller Conveyor



The GURA Gravity Pallet Roller Conveyor is designed to convey pallets, boxes, steel and plastic containers. This roller conveyor is mainly used in in-house transport with picking, sorting and distribution systems.

It safely conveys goods up to a maximum load of 2000 daN.


The zinc-plated rollers are equipped with an internal thread axle and steel roller beds. As a standard the sigma profile comes Sendzimir zinc-plated (SV). It is also available enamelled. The durable H-type supports made of a U-shaped profile (50x100x50x5) come enamelled and are equipped with adjustable feet (M24) with a range of adjustment of \varnothing 30 mm or rather \varnothing 50 mm.

Ancillary equipment: eg. end stops, side stops, buffers, centring devices and light barrier holders.

Additional system components are available too.

GURA Pallet Roller Conveyor

- Bed widths (NB): 900, 1100 mm
- Customized widths possible
- Lengths: as a multiple of the modular dimension as required
- Roller pitches: 100 mm, 150 mm, 200 mm
- Sigma profile: 130x60 mm, Sendzimir zinc-plated (SV) or enamelled (SL)
- Durable H-type supports with adjustable feet (M24), enamelled
- Standard conveyor height: 500/300 mm, special heights on request

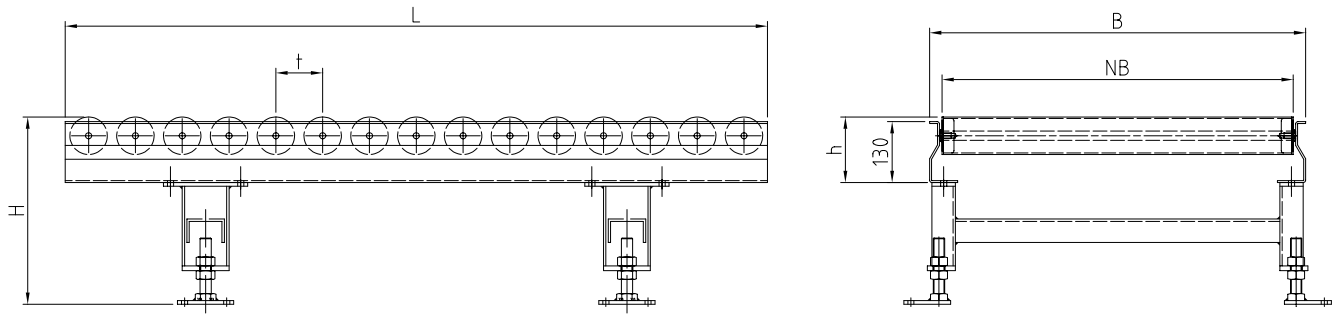

Gravity Pallet Roller Conveyor, Sigma Profile

| Series | NB [mm] | t [mm] | L [mm] | Rollers D [mm] | h [mm] | H [mm] | Capacity* [daN] |
|--------|----------|---------------|------------|----------------|--------|---------|-----------------|
| 60700 | | | 1000,1500 | 60x2 SV | 140 | | |
| 60800 | 900,1100 | 100, 150, 200 | 2000, 3000 | 80x2 SV | 140 | 300,500 | max. ca 2000 |
| 60900 | | | | 89x3 SV | 144,5 | | |

SV = Zinc-plated steel

* Mandatory values on request

Example order: 60700 – 150 – 900 – 1500 = Roller Conveyor Segment, Rollers 60x2 mm, Zinc-Plated Steel

60700 = Series no.

150 = Roller pitch (t) [mm]

900 = Nominal width (NB) [mm]

1500 = Length (L) [mm], as a multiple of the roller pitch

Ancillary Equipment:

| Series | NB [mm] | H [mm] | Description |
|--------|-----------|----------|--|
| F6005 | | | foot, +- 50 mm |
| F6006 | 900, 1100 | 300, 500 | foot, +- 30 mm |
| 64900 | | | buffer, running meter |
| 64910 | | | charging device, heavy version |
| 64930 | | | charging device, light version, mounted at roller conveyor |
| 64940 | | | light barrier and reflector holder |
| 95990 | | | Flange, set, screwed D = 80 [mm] |